



■ Features :

- Universal AC input / Full range
- No load power consumption < 0.3W
- Energy efficiency Level V
- Comply with EISA 2007, NRCAN, AU/NZ MEPS and EU ErP
- 3 pole AC inlet IEC320-C14
- Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Pass LPS
- Fully enclosed plastic case
- LED indicator for power on
- 2 years warranty




SPECIFICATION

ORDER NO.	GS60A05-P1J	GS60A07-P1J	GS60A09-P1J	GS60A12-P1J	GS60A15-P1J	GS60A18-P1J	GS60A24-P1J	GS60A48-P1J																																																																																																			
OUTPUT	<table border="1"> <tr> <td>SAFETY MODEL NO.</td> <td>GS60A05</td> <td>GS60A07</td> <td>GS60A09</td> <td>GS60A12</td> <td>GS60A15</td> <td>GS60A18</td> <td>GS60A24</td> <td>GS60A48</td> </tr> <tr> <td>DC VOLTAGE <small>Note.2</small></td> <td>5V</td> <td>7.5V</td> <td>9V</td> <td>12V</td> <td>15V</td> <td>18V</td> <td>24V</td> <td>48V</td> </tr> <tr> <td>RATED CURRENT</td> <td>6A</td> <td>6A</td> <td>6A</td> <td>5A</td> <td>4A</td> <td>3.33A</td> <td>2.5A</td> <td>1.25A</td> </tr> <tr> <td>CURRENT RANGE</td> <td>0 ~ 6A</td> <td>0 ~ 6A</td> <td>0 ~ 6A</td> <td>0 ~ 5A</td> <td>0 ~ 4A</td> <td>0 ~ 3.33A</td> <td>0 ~ 2.5A</td> <td>0 ~ 1.25A</td> </tr> <tr> <td>RATED POWER (max.)</td> <td>30W</td> <td>45W</td> <td>54W</td> <td>60W</td> <td>60W</td> <td>60W</td> <td>60W</td> <td>60W</td> </tr> <tr> <td>RIPPLE & NOISE (max.) <small>Note.3</small></td> <td>100mVp-p</td> <td>100mVp-p</td> <td>100mVp-p</td> <td>100mVp-p</td> <td>100mVp-p</td> <td>150mVp-p</td> <td>180mVp-p</td> <td>240mVp-p</td> </tr> <tr> <td>VOLTAGE TOLERANCE <small>Note.4</small></td> <td>±5.0%</td> <td>±5.0%</td> <td>±5.0%</td> <td>±3.0%</td> <td>±3.0%</td> <td>±3.0%</td> <td>±3.0%</td> <td>±2.5%</td> </tr> <tr> <td>LINE REGULATION <small>Note.5</small></td> <td>±1.0%</td> <td>±1.0%</td> <td>±1.0%</td> <td>±1.0%</td> <td>±1.0%</td> <td>±1.0%</td> <td>±1.0%</td> <td>±1.0%</td> </tr> <tr> <td>LOAD REGULATION</td> <td>±5.0%</td> <td>±5.0%</td> <td>±5.0%</td> <td>±3.0%</td> <td>±3.0%</td> <td>±3.0%</td> <td>±3.0%</td> <td>±2.5%</td> </tr> <tr> <td>SETUP, RISE TIME <small>Note.6</small></td> <td colspan="8">1000ms, 30ms / 230VAC 1000ms, 30ms / 115VAC at full load</td> </tr> <tr> <td>HOLD UP TIME (Typ.)</td> <td colspan="8">50ms / 230VAC 15ms / 115VAC at full load</td> </tr> </table>								SAFETY MODEL NO.	GS60A05	GS60A07	GS60A09	GS60A12	GS60A15	GS60A18	GS60A24	GS60A48	DC VOLTAGE <small>Note.2</small>	5V	7.5V	9V	12V	15V	18V	24V	48V	RATED CURRENT	6A	6A	6A	5A	4A	3.33A	2.5A	1.25A	CURRENT RANGE	0 ~ 6A	0 ~ 6A	0 ~ 6A	0 ~ 5A	0 ~ 4A	0 ~ 3.33A	0 ~ 2.5A	0 ~ 1.25A	RATED POWER (max.)	30W	45W	54W	60W	60W	60W	60W	60W	RIPPLE & NOISE (max.) <small>Note.3</small>	100mVp-p	100mVp-p	100mVp-p	100mVp-p	100mVp-p	150mVp-p	180mVp-p	240mVp-p	VOLTAGE TOLERANCE <small>Note.4</small>	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±3.0%	±2.5%	LINE REGULATION <small>Note.5</small>	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	LOAD REGULATION	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±3.0%	±2.5%	SETUP, RISE TIME <small>Note.6</small>	1000ms, 30ms / 230VAC 1000ms, 30ms / 115VAC at full load								HOLD UP TIME (Typ.)	50ms / 230VAC 15ms / 115VAC at full load							
SAFETY MODEL NO.	GS60A05	GS60A07	GS60A09	GS60A12	GS60A15	GS60A18	GS60A24	GS60A48																																																																																																			
DC VOLTAGE <small>Note.2</small>	5V	7.5V	9V	12V	15V	18V	24V	48V																																																																																																			
RATED CURRENT	6A	6A	6A	5A	4A	3.33A	2.5A	1.25A																																																																																																			
CURRENT RANGE	0 ~ 6A	0 ~ 6A	0 ~ 6A	0 ~ 5A	0 ~ 4A	0 ~ 3.33A	0 ~ 2.5A	0 ~ 1.25A																																																																																																			
RATED POWER (max.)	30W	45W	54W	60W	60W	60W	60W	60W																																																																																																			
RIPPLE & NOISE (max.) <small>Note.3</small>	100mVp-p	100mVp-p	100mVp-p	100mVp-p	100mVp-p	150mVp-p	180mVp-p	240mVp-p																																																																																																			
VOLTAGE TOLERANCE <small>Note.4</small>	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±3.0%	±2.5%																																																																																																			
LINE REGULATION <small>Note.5</small>	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%																																																																																																			
LOAD REGULATION	±5.0%	±5.0%	±5.0%	±3.0%	±3.0%	±3.0%	±3.0%	±2.5%																																																																																																			
SETUP, RISE TIME <small>Note.6</small>	1000ms, 30ms / 230VAC 1000ms, 30ms / 115VAC at full load																																																																																																										
HOLD UP TIME (Typ.)	50ms / 230VAC 15ms / 115VAC at full load																																																																																																										
INPUT	<table border="1"> <tr> <td>VOLTAGE RANGE <small>Note.7</small></td> <td colspan="2">90 ~ 264VAC</td> <td colspan="6">135 ~ 370VDC</td> </tr> <tr> <td>FREQUENCY RANGE</td> <td colspan="8">47 ~ 63Hz</td> </tr> <tr> <td>EFFICIENCY (Typ.)</td> <td>81%</td> <td>85.5%</td> <td>87.5%</td> <td>88%</td> <td>88.5%</td> <td>88.5%</td> <td>90%</td> <td>92%</td> </tr> <tr> <td>AC CURRENT (Typ.)</td> <td colspan="2">1.4A / 115VAC</td> <td colspan="6">1A / 230VAC</td> </tr> <tr> <td>INRUSH CURRENT (max.)</td> <td colspan="8">65A / 230VAC</td> </tr> <tr> <td>LEAKAGE CURRENT(max.)</td> <td colspan="8">0.75mA / 240VAC</td> </tr> </table>								VOLTAGE RANGE <small>Note.7</small>	90 ~ 264VAC		135 ~ 370VDC						FREQUENCY RANGE	47 ~ 63Hz								EFFICIENCY (Typ.)	81%	85.5%	87.5%	88%	88.5%	88.5%	90%	92%	AC CURRENT (Typ.)	1.4A / 115VAC		1A / 230VAC						INRUSH CURRENT (max.)	65A / 230VAC								LEAKAGE CURRENT(max.)	0.75mA / 240VAC																																																				
VOLTAGE RANGE <small>Note.7</small>	90 ~ 264VAC		135 ~ 370VDC																																																																																																								
FREQUENCY RANGE	47 ~ 63Hz																																																																																																										
EFFICIENCY (Typ.)	81%	85.5%	87.5%	88%	88.5%	88.5%	90%	92%																																																																																																			
AC CURRENT (Typ.)	1.4A / 115VAC		1A / 230VAC																																																																																																								
INRUSH CURRENT (max.)	65A / 230VAC																																																																																																										
LEAKAGE CURRENT(max.)	0.75mA / 240VAC																																																																																																										
PROTECTION	<table border="1"> <tr> <td>OVERLOAD</td> <td colspan="8">105 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed</td> </tr> <tr> <td>OVER VOLTAGE</td> <td>5.25 ~ 6.75V</td> <td>7.88 ~ 10.13V</td> <td>9.45 ~ 12.15V</td> <td>12.6 ~ 16.2V</td> <td>15.75 ~ 20.25V</td> <td>18.9 ~ 24.3V</td> <td>25.2 ~ 32.4V</td> <td>50.4 ~ 64.8V</td> </tr> <tr> <td></td> <td colspan="8">Protection type : Shut down o/p voltage, re-power on to recover</td> </tr> <tr> <td>OVER TEMPERATURE</td> <td colspan="8">Shut down o/p voltage, re-power on to recover</td> </tr> </table>								OVERLOAD	105 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed								OVER VOLTAGE	5.25 ~ 6.75V	7.88 ~ 10.13V	9.45 ~ 12.15V	12.6 ~ 16.2V	15.75 ~ 20.25V	18.9 ~ 24.3V	25.2 ~ 32.4V	50.4 ~ 64.8V		Protection type : Shut down o/p voltage, re-power on to recover								OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover																																																																						
OVERLOAD	105 ~ 150% rated output power Protection type : Hiccup mode, recovers automatically after fault condition is removed																																																																																																										
OVER VOLTAGE	5.25 ~ 6.75V	7.88 ~ 10.13V	9.45 ~ 12.15V	12.6 ~ 16.2V	15.75 ~ 20.25V	18.9 ~ 24.3V	25.2 ~ 32.4V	50.4 ~ 64.8V																																																																																																			
	Protection type : Shut down o/p voltage, re-power on to recover																																																																																																										
OVER TEMPERATURE	Shut down o/p voltage, re-power on to recover																																																																																																										
ENVIRONMENT	<table border="1"> <tr> <td>WORKING TEMP.</td> <td colspan="8">-30 ~ +60°C (Refer to "Derating Curve")</td> </tr> <tr> <td>WORKING HUMIDITY</td> <td colspan="8">20% ~ 90% RH non-condensing</td> </tr> <tr> <td>STORAGE TEMP., HUMIDITY</td> <td colspan="8">-40 ~ +85°C, 10 ~ 95% RH</td> </tr> <tr> <td>TEMP. COEFFICIENT</td> <td colspan="8">±0.03% / °C (0 ~ 40°C)</td> </tr> <tr> <td>VIBRATION</td> <td colspan="8">10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes</td> </tr> </table>								WORKING TEMP.	-30 ~ +60°C (Refer to "Derating Curve")								WORKING HUMIDITY	20% ~ 90% RH non-condensing								STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH								TEMP. COEFFICIENT	±0.03% / °C (0 ~ 40°C)								VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes																																																													
WORKING TEMP.	-30 ~ +60°C (Refer to "Derating Curve")																																																																																																										
WORKING HUMIDITY	20% ~ 90% RH non-condensing																																																																																																										
STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH																																																																																																										
TEMP. COEFFICIENT	±0.03% / °C (0 ~ 40°C)																																																																																																										
VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes																																																																																																										
SAFETY & EMC (Note. 8)	<table border="1"> <tr> <td>SAFETY STANDARDS</td> <td colspan="8">UL60950-1, CSA C22.2, TUV EN60950-1, BSMI CNS14336, CCC GB4943, PSE J60950-1 approved</td> </tr> <tr> <td>WITHSTAND VOLTAGE</td> <td colspan="8">I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC</td> </tr> <tr> <td>ISOLATION RESISTANCE</td> <td colspan="8">I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH</td> </tr> <tr> <td>EMC EMISSION</td> <td colspan="8">Compliance to EN55022 class B, EN61000-3-2,3, FCC PART 15 / CISPR22 class B, CNS13438 class B, GB9254, GB17625.1</td> </tr> <tr> <td>EMC IMMUNITY</td> <td colspan="8">Compliance to EN61000-4-2,3,4,5,6,8,11, light industry level, criteria A</td> </tr> </table>								SAFETY STANDARDS	UL60950-1, CSA C22.2, TUV EN60950-1, BSMI CNS14336, CCC GB4943, PSE J60950-1 approved								WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC								ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH								EMC EMISSION	Compliance to EN55022 class B, EN61000-3-2,3, FCC PART 15 / CISPR22 class B, CNS13438 class B, GB9254, GB17625.1								EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, light industry level, criteria A																																																													
SAFETY STANDARDS	UL60950-1, CSA C22.2, TUV EN60950-1, BSMI CNS14336, CCC GB4943, PSE J60950-1 approved																																																																																																										
WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC																																																																																																										
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH																																																																																																										
EMC EMISSION	Compliance to EN55022 class B, EN61000-3-2,3, FCC PART 15 / CISPR22 class B, CNS13438 class B, GB9254, GB17625.1																																																																																																										
EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, light industry level, criteria A																																																																																																										
OTHERS	<table border="1"> <tr> <td>MTBF</td> <td colspan="8">711K hrs min. MIL-HDBK-217F(25°C)</td> </tr> <tr> <td>DIMENSION</td> <td colspan="8">125*50*31.5mm (L*W*H)</td> </tr> <tr> <td>PACKING</td> <td colspan="8">0.305Kg; 40pcs/13.02Kg/1.05CUFT</td> </tr> </table>								MTBF	711K hrs min. MIL-HDBK-217F(25°C)								DIMENSION	125*50*31.5mm (L*W*H)								PACKING	0.305Kg; 40pcs/13.02Kg/1.05CUFT																																																																															
MTBF	711K hrs min. MIL-HDBK-217F(25°C)																																																																																																										
DIMENSION	125*50*31.5mm (L*W*H)																																																																																																										
PACKING	0.305Kg; 40pcs/13.02Kg/1.05CUFT																																																																																																										
CONNECTOR	<table border="1"> <tr> <td>PLUG</td> <td colspan="8">See page 2 ; Other type available by customer requested</td> </tr> <tr> <td>CABLE</td> <td colspan="8">See page 2 ; Other type available by customer requested</td> </tr> </table>								PLUG	See page 2 ; Other type available by customer requested								CABLE	See page 2 ; Other type available by customer requested																																																																																								
PLUG	See page 2 ; Other type available by customer requested																																																																																																										
CABLE	See page 2 ; Other type available by customer requested																																																																																																										
NOTE	<ol style="list-style-type: none"> All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient. DC voltage: The output voltage set at point measure by plug terminal & 50% load. Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor. Tolerance: includes set up tolerance, line regulation, load regulation. Line regulation is measured from low line to high line at rated load. Length of set up time is measured at first cold start. Turning ON/OFF the power supply may lead to increase of the set up time. Derating may be needed under low input voltages. Please check the derating curve for more details. The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) 																																																																																																										

Mechanical Specification

Case No. GS60A Unit:mm

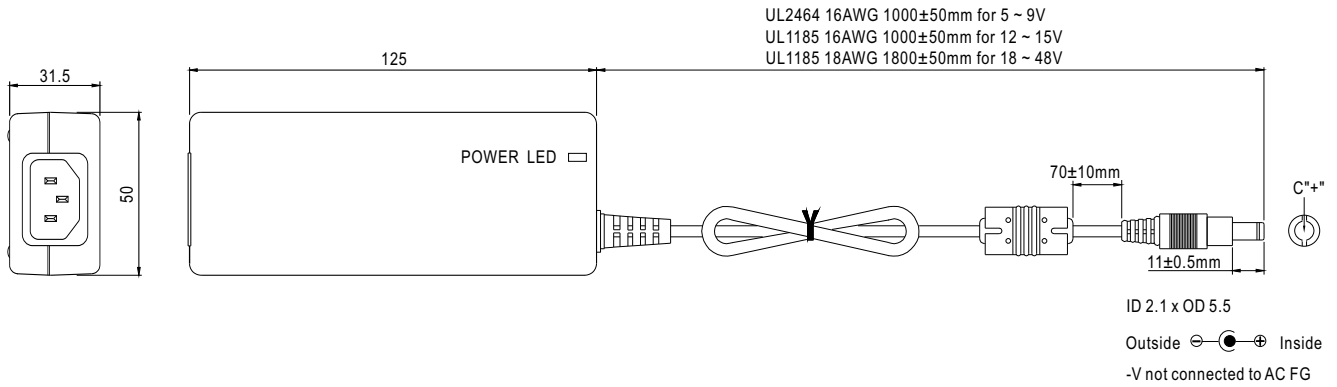


Plug Assignment

Standard plug: P1J

P1J	
P/N	OUTPUT
CENTER	+

Derating Curve

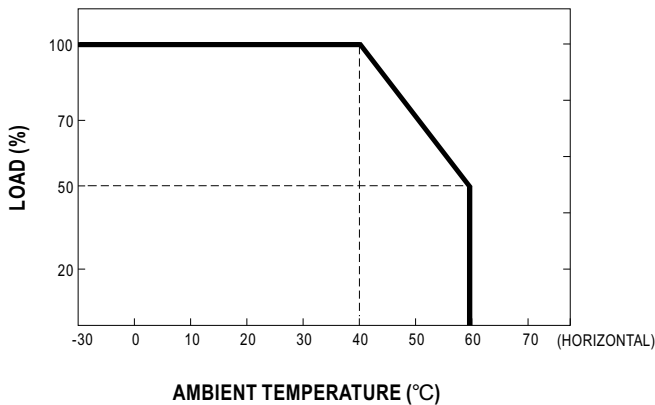

Static Characteristics

